

SOLUTIONS LOOKING FOR TASKS



JOLLY JUNIOR S


**PIATTAFORMA DI LAVORO AUTO-SOLLEVANTE
MAST CLIMBING WORK PLATFORM
PLATE-FORME DE TRAVAIL À LEVAGE AUTOMATIQUE**

Safi

CORNUDA (TREVISO) - ITALY

CE

JOLLY JUNIOR S

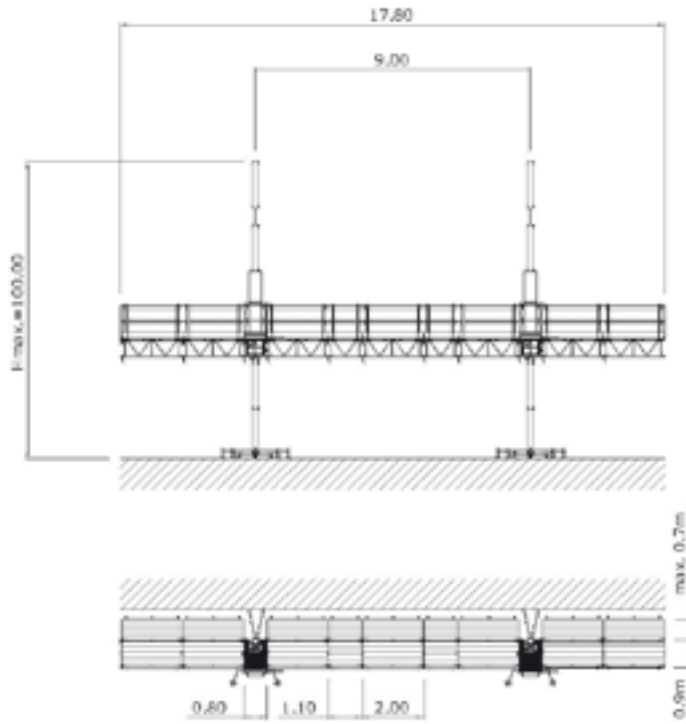

MASSIMA CONFIGURAZIONE BI-COLONNA/MAXIMUM TWIN-MAST CONFIGURATION/CONFIGURATION MAXIMALE À DEUX-COLONNES

DATI TECNICI	TECHNICAL DATA	DONNÉES TECHNIQUES	JOLLY JUNIOR S	
Traliccio tubolare	Tubular mast	Mât tubulaire		
N° colonne	Number of masts	Nombre de mats	1	2
Portata massima	Maximum payload	Portée maximale	400daN	800daN
Numero massimo di persone	Maximum number of persons	Nombre de personnes admises	2	4
Altezza massima	Maximum height	Hauteur maximale	100.0m	100.0m
Distanza ancoraggi	Tie distance	Distance entre les ancrages	6.0m	6.0m
Lunghezza massima	Maximum length	Longueur maximale	5.30m	17.80m
Lunghezza estensioni a parete	Wall-side brackets length	Encorbellement vers le paroi	0.60m	0.60m
Potenza nominale	Rated power	Puissance nominale	1x1.5Kw	2x1.5Kw
Alimentazione	Power supply	Alimentation	220÷240/380÷420V 50Hz	220÷240/380÷420V 50Hz
Corrente di spunto	Starting current	Courant absorbé au démarrage	20A	40A
Velocità di sollevamento	Travelling speed	Vitesse de levage	7.0m/min	7.0m/min

DATI TECNICI/TECHNICAL DATA/CARACTÉRISTIQUES TECHNIQUES



RIVENDITORE AUTORIZZATO/
AUTHORIZED DEALER/
DÉTAILLANT AUTORISÉ:



INSA INTERNATIONAL SCAFFOLDING S.R.L.
VIA S. ROCCO, 8 - 31041 - CORNUDA - TV - ITALY
TEL- +39 0423639321 - FAX +39 0423639410
WEB: WWW.SAFI.IT - E-MAIL: BOX@SAFI.IT